


## 2" Single Union PVC Ball Valve

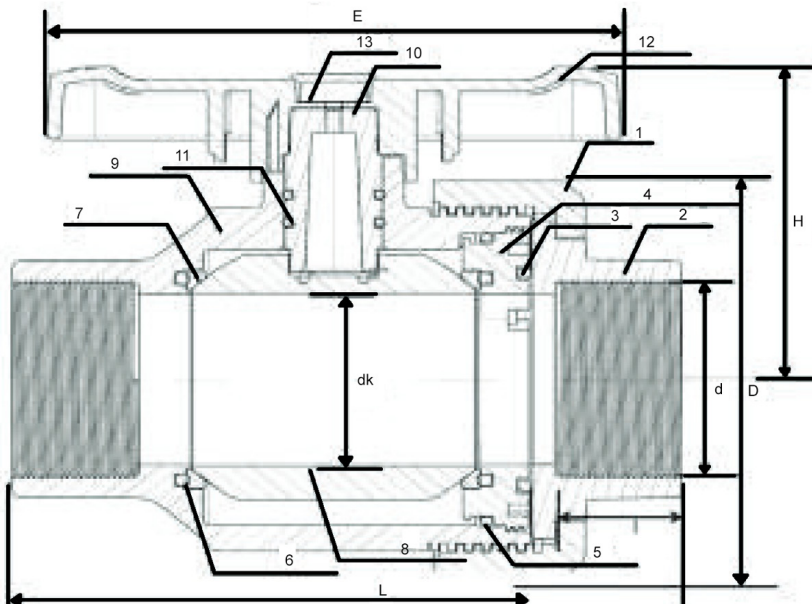

<b>Size</b>	2"
<b>Body Material</b>	PVC
<b>Connections</b>	Slip/Weld
<b>Pressure Rating</b>	232 PSI
<b>Weight</b>	1.98 lbs

### Features

- Quarter-turn handle operated ball valve
- TPE seals with O-ring gives cushioning effect that ensures leakage free and low fixed torque
- Union nut load does not transfer onto ball
- Chemical and corrosion resistant, color UV stabilized

### Dimensions

Size	ASTM (d)		dk		D		l		L		Lt		E		H	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1-1/2"	1.9	48.26	1.4	37	3.7	94	1.3	32	3.9	98	5.4	137	4.8	121	3.6	91
<b>2"</b>	<b>2.38</b>	<b>60.33</b>	<b>1.9</b>	<b>50</b>	<b>4.6</b>	<b>116</b>	<b>1.4</b>	<b>35</b>	<b>4.7</b>	<b>119</b>	<b>6.5</b>	<b>165</b>	<b>5.9</b>	<b>150</b>	<b>3.9</b>	<b>98</b>
3"	3.5	88.9	3	76	7.1	179	1.8	44	7.1	180	9.2	234	7.9	200	5.5	139

### Materials List

No.	Part Name	Material
1	Ring	UPVC
2	Socket	UPVC
3	Bush Small O-Ring	HNBR
4	Bush	UPVC
5	Bush Big O-Ring	HNBR
6	Seal Washer*	HNBR
7	Seal	TPE
8	Ball	UPVC
9	Body	UPVC
10	Shaft	UPVC
11	Shaft O-Ring	HNBR
12	Handle	ABS
13	Handle Logo	ABS

\* Only in 3" Ball Valve