


3" Single Union PVC Ball Valve

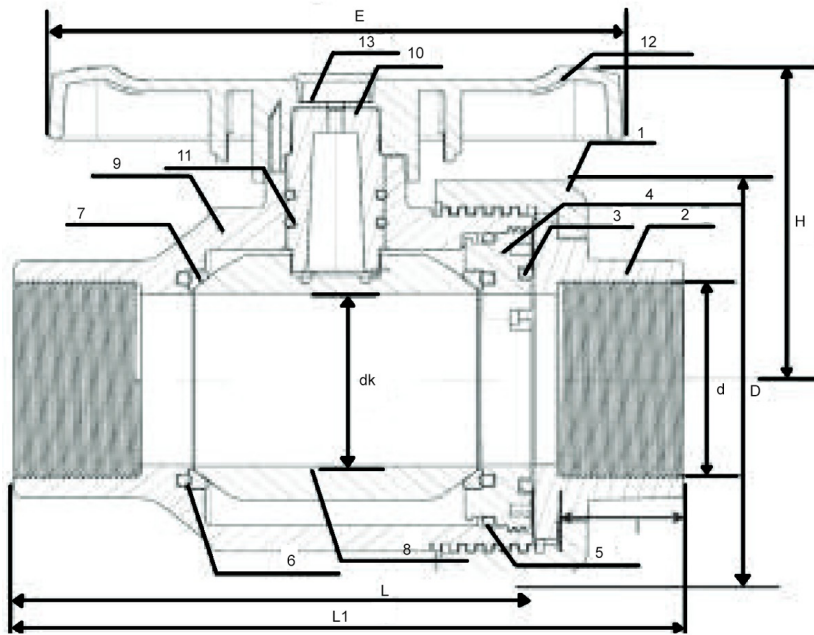

Size	3"
Body Material	PVC
Connections	Slip/Weld
Pressure Rating	145 PSI
Weight	5.73 lbs

Features

- Quarter-turn handle operated ball valve
- TPE seals with O-ring gives cushioning effect that ensures leakage free and low fixed torque
- Union nut load does not transfer onto ball
- Chemical and corrosion resistant, color UV stabilized

Dimensions

Size	ASTM (d)		dk		D		I		L		Lt		E		H	
in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1-1/2"	1.9	48.26	1.4	37	3.7	94	1.3	32	3.9	98	5.4	137	4.8	121	3.6	91
2"	2.38	60.33	1.9	50	4.6	116	1.4	35	4.7	119	6.5	165	5.9	150	3.9	98
3"	3.5	88.9	3	76	7.1	179	1.8	44	7.1	180	9.2	234	7.9	200	5.5	139

Materials List

No.	Part Name	Material
1	Ring	UPVC
2	Socket	UPVC
3	Bush Small O-Ring	HNBR
4	Bush	UPVC
5	Bush Big O-Ring	HNBR
6	Seal Washer*	HNBR
7	Seal	TPE
8	Ball	UPVC
9	Body	UPVC
10	Shaft	UPVC
11	Shaft O-Ring	HNBR
12	Handle	ABS
13	Handle Logo	ABS

* Only in 3" Ball Valve