


## 3" Double Union PVC Ball Valve

<b>Size</b>	3"
<b>Body Material</b>	PVC
<b>Connections</b>	AS 2129 Flange
<b>Pressure Rating</b>	145 PSI
<b>Weight</b>	10.36 lbs

### Features

- Quarter-turn handle operated ball valve
- TPE seals with O-ring gives cushioning effect that ensures leakage free and low fixed torque
- Union nut load does not transfer onto ball
- Chemical and corrosion resistant, color UV stabilized
- AS 2129 Flange Specs

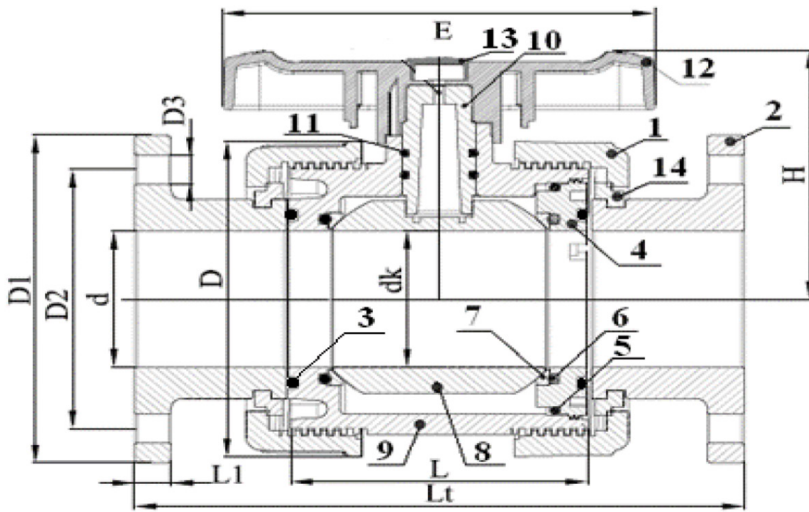

### Dimensions

Size	d	dk	D	D1	D2	L	L1	Lt	E	H										
in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm										
3"	3	76	3	76	7.1	179	7.3	184	5.7	145	5.4	138	0.6	16	10.8	275	7.9	200	5.5	139

### Materials List

No.	Part Name	Material
1	Ring	UPVC
2	Flange Socket	UPVC
3	Bush Small O-Ring	HNBR
4	Bush	UPVC
5	Bush Big O-Ring	HNBR
6	Seal O-Ring	HNBR
7	Seal	TPE
8	Ball	UPVC
9	Body	UPVC
10	Shaft	UPVC
11	Shaft O-Ring	HNBR
12	Handle	ABS
13	Handle Logo	ABS
14	Flange Clamp	UPVC