


6" Cast Iron Butterfly Valve | Wafer EPDM Seat, Lever Operated

Cast iron wafer style butterfly valve with nickel plated ductile iron disc and EPDM seat.

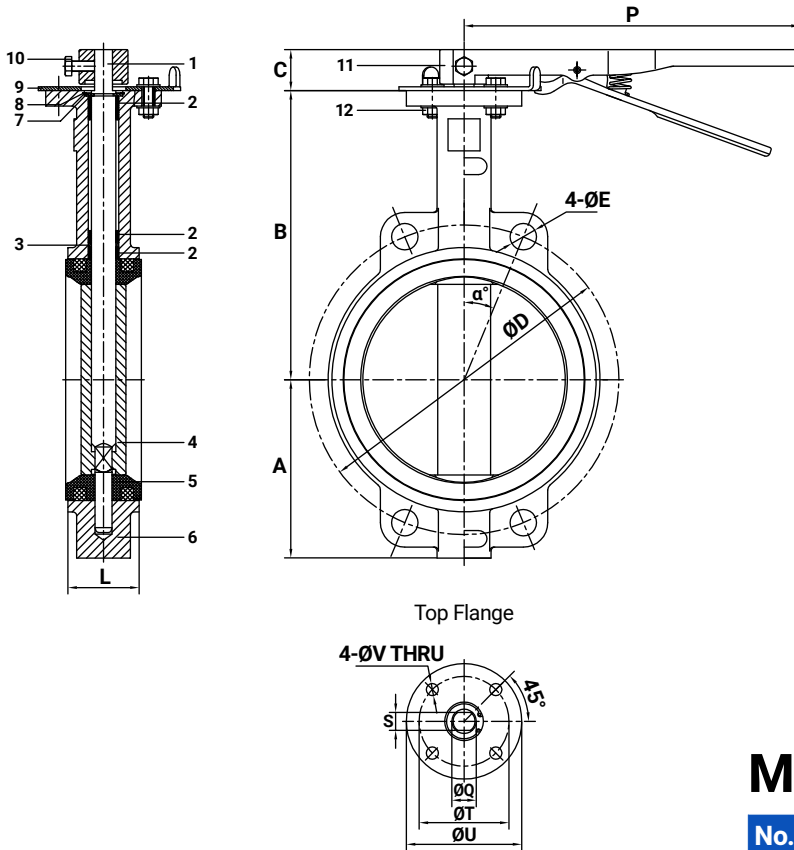

Size	6"
Body Material	Cast Iron
Body Design	Wafer
Operation	Lever
Connections	Flange / ANSI 125
Pressure Rating	150 PSI
Length (End to End)	2.2"
Weight	20 lbs

Features

- Lever handle can lock in 10 positions for throttle control
- Fusion-Bonded Epoxy Coating
- Does not require flange gaskets thanks to EPDM seat

Materials List

No.	Part Name	Material	No.	Part Name	Material
1	Stem	SS416	7	Thrust Washer	Carbon Steel
2	Bushing	PTFE	8	Circlip	Carbon Steel
3	O-Ring	EPDM	9	Locking Plate	SS420
4	Disc	Ductile Iron	10	Locking Screw	Stainless Steel
5	Seat	EPDM	11	Lever	Malleable CI
6	Body	Cast Iron	12	Bolt & Nut	Stainless Steel

Dimensions

Size	A		B		C		Class150 (in. mm)			L		P		ØQ		S		ØT		ØU		ØV			
in.	in.	mm	in.	mm	in.	mm	a°	ØD	ØE	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
2"	3	76	6¾	162	1¼	32	45°	4¾	120.7	1⅞	17.46	1½	42	10⅞	255	½	12.7	¾	10	2¾	70	3⅞	90	¾	9.5
3"	3¾	95	7⅞	181	1¼	32	45°	6	152.4	1⅞	17.46	1¾	45	10⅞	255	½	12.7	¾	10	2¾	70	3⅞	90	¾	9.5
4"	4½	114	7⅞	200	1¼	32	22.5°	7½	190.5	1⅞	17.46	2⅞	52	10⅞	255	¾	15.88	½	12	2¾	70	3⅞	90	¾	9.5
6"	5½	139	8⅞	225	1¼	32	22.5°	9½	241.3	1⅞	20.64	2⅞	56	10⅞	255	¾	19.05	⅞	14	2¾	70	3⅞	90	¾	9.5
8"	7	177	10¼	260	1½	38	22.5°	11¼	298.5	1⅞	20.64	2¾	60	14	355	⅞	22.23	1⅞	17	4	102	4⅞	125	⅞	11.5
10"	8	203	11½	292	1½	38	15°	14¼	362	1⅞	23.81	2¾	66	14	355	1⅞	28.58	⅞	22	4	102	4⅞	125	⅞	11.5
12"	9½	242	13¼	337	1½	38	15°	17	431.8	1⅞	23.81	3⅞	77	14	355	1¼	31.75	1⅞	24	4	102	4⅞	125	⅞	11.5