


## 2" PVC Butterfly Valve EPDM Seat, Lever Operated

PVC wafer style butterfly valve with EPDM seat.

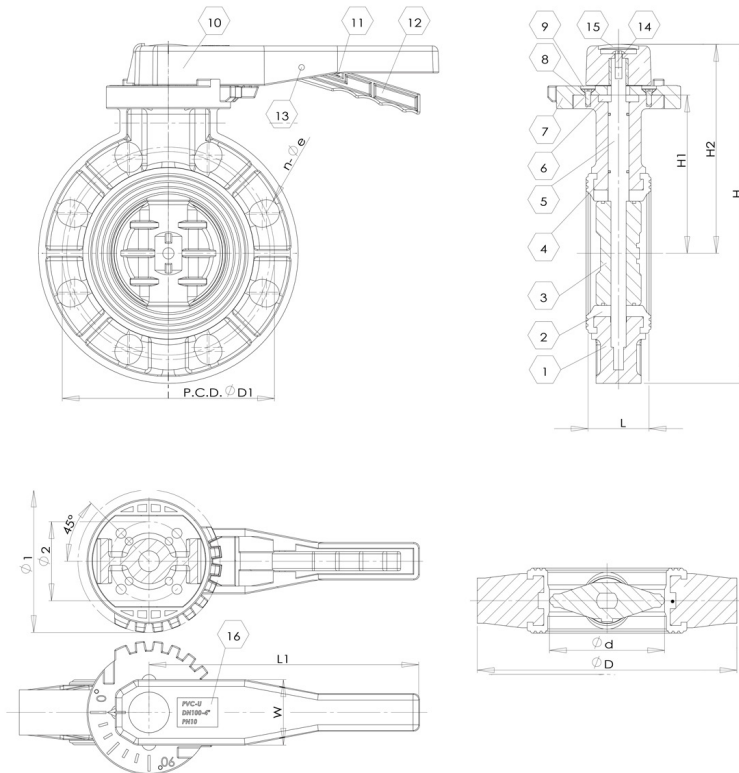

<b>Size</b>	2"
<b>Body Material</b>	PVC
<b>Body Design</b>	Wafer
<b>Operation</b>	Lever
<b>Connections</b>	Flange / ANSI 125
<b>Pressure Rating</b>	150 PSI
<b>Weight</b>	3 lbs

### Features

- Lever handle can lock in 10 positions for throttle control
- Excellent corrosion resistance
- Does not require flange gaskets thanks to EPDM seat

### Materials List

No.	Part Name	Material	No.	Part Name	Material
1	Body	CPVC	9	Bolt Cover	ABS
2	Seat	EPDM	10	Handle	ABS
3	Disc	PVC	11	Spring	304 SST
4	O-Ring	EPDM	12	Lever	ABS
5	Stem	Steel	13	Pin	Steel
6	Locking Block	PVC	14	Bolt	Steel
7	Indicator Plate	ABS	15	Mark Cap	ABS
8	Bolt	Steel	16	Logo Plate	ABS

### Dimensions

Size	DN	n-Øe	P.C.D. D1		d		D		H1		H2		H		L		Ø1	Ø2	L1		W		
in.			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
2"	50	4-Ø19	4.8	121	1.9	48	6.3	160	3.9	100	5.6	143	8.8	223	1.7	43	4.9	124	ISO5211 F05 / F07	7.5	190	2.2	55
3"	80	4-Ø19	6	152	3.1	78	7.7	196	4.8	120	6.8	172	10.6	270	1.9	49	4.9	124	ISO5211 F05 / F07	9.4	240	2.2	55
4"	100	8-Ø19	7.5	191	3.9	98	9	228	5.5	140	7.6	194	12.1	308	2.1	54	4.9	124	ISO5211 F05 / F07	9.4	240	2.2	55
6"	150	8-Ø23	9.5	241	5.8	146	11.3	287	7.1	181	9.4	239	15.1	382	2.8	70	6.7	170	ISO5211 F07 / F10	12.2	310	2.8	72