




PRODUCT SPECIFICATION SHEET | **SKU RK-23LA7**

RK-23LA7 Brass Impact Sprinkler – 1/2" MNPT Full Circle 7° Low Angle

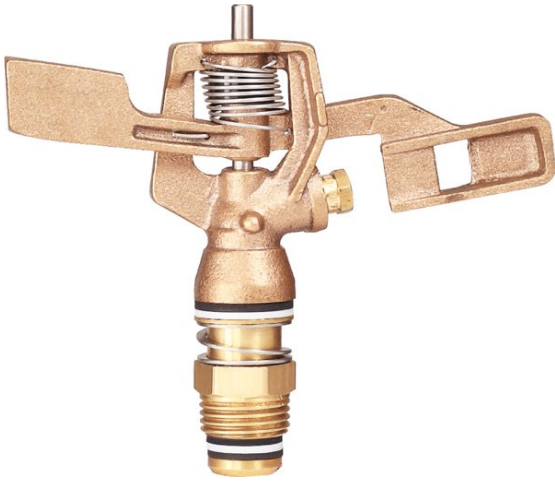

SPECIFICATIONS

Connection	1/2" MNPT
Coverage Pattern	Full Circle
Trajectory	7° Low Angle
Nozzle	1/8"
Flow Range	1.4–4.6 GPM
Radius	25–35 ft
Pressure Range	30–65 PSI
Body / Arm	Bronze
Nut / Tube	Brass
Spring / Pin	Stainless Steel
Drive	Spring Arm Impact

The RK-23LA7 delivers an extremely flat 7° trajectory for situations where wind interference, low canopy clearance, or frost protection requirements demand water be kept as close to ground level as possible. It is well suited to under-tree microclimate irrigation, frost control in orchards, and exposed field sites with persistent wind.

FEATURES

- 7° ultra-low trajectory – the flattest arc in the RK-23 family, resisting wind drift even in exposed locations and keeping water under low canopies.
- Full-circle pattern – provides even distribution around each riser for consistent crop coverage.
- Bronze body and arm – durable in continuous-run and chemigation service.
- Brass nut and tube – precise nozzle alignment maintained over long service intervals.
- Stainless steel spring and pin – corrosion-resistant impact drive for reliable, low-maintenance operation.
- 30–65 PSI operating range – fits standard farm system pressures without additional regulation.