




PRODUCT SPECIFICATION SHEET | **SKU RK-30**

RK-30 Brass Impact Sprinkler – 3/4" MNPT Full Circle 27°

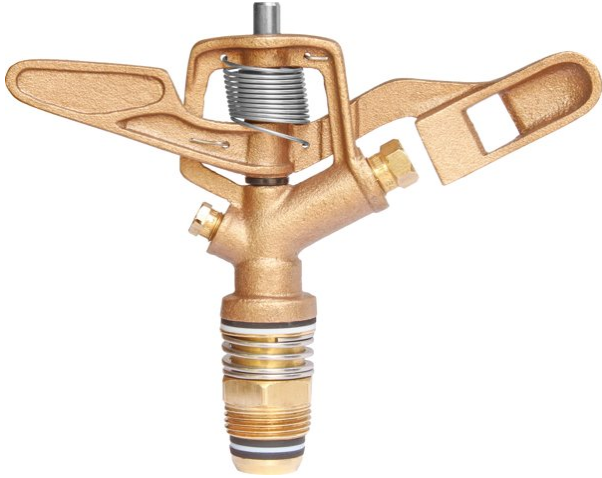

SPECIFICATIONS

Connection	3/4" MNPT
Coverage Pattern	Full Circle
Trajectory	27°
Nozzles	11/64" x 1/8"
Flow Range	3.1–13.9 GPM
Radius	33.8–59 ft
Pressure Range	30–70 PSI
Body / Arm	Bronze
Nut / Tube	Brass
Spring / Pin	Stainless Steel
Drive	Spring Arm Impact

The RK-30 is the most widely used agricultural impact sprinkler in the IrrigationKing line.

Its 3/4" MNPT connection, dual 11/64" x 1/8" nozzles, and wide 3.1–13.9 GPM flow range make it compatible with the broadest range of farm systems – from small pumped laterals to large mainline distribution networks. Radius 33.8–59 ft at 30–70 PSI.

FEATURES

- 3/4" MNPT connection – the standard size for the majority of agricultural riser and lateral systems, ensuring broad compatibility.
- Dual nozzle set (11/64" x 1/8") – two nozzles allow the operator to select the flow rate that matches system design without changing the sprinkler body.
- 27° trajectory – the industry-standard angle for optimum throw distance and distribution uniformity in open field conditions.
- Wide flow range (3.1–13.9 GPM) – accommodates a broad range of system pressures and spacings.
- Bronze body and arm – corrosion-resistant for long service life in continuous-run and chemigation applications.
- Brass nut and tube – precise nozzle alignment for consistent distribution uniformity across a field.
- Stainless steel spring and pin – corrosion-resistant impact drive for low-maintenance seasonal and year-round operation.